

Test Report

**INVESTIGATION OF WIND PROJECTILE
RESISTANCE OF STEELCRAFT
MODEL B14 & MODEL L14 SHELTER DOORS**

Submitted to

**Mr. Kelly Hall
Fiberglass Creations
P.O. Box 2042
Henderson, Texas 75653**

Testing Performed by

**The Wind Science and Engineering Research Center
Texas Tech University
Box 41023
Lubbock, TX 79409-1023**

Investigators

**Ernst W. Kiesling, Ph.D., P.E.
Larry J. Tanner, P.E.**

Date Submitted

March 26, 2001

TEXAS TECH UNIVERSITY

Wind Engineering Research Center

Box 41023
Lubbock, TX 79409-1023
Telephone (806) 742-3476
FAX (806) 742-3446
<http://www.wind.ttu.edu>

March 24, 2001

Mr. Kelly Hall
Fiberglass Creations
P.O. Box 2042
Henderson, TX 75653


Re: Shelter Component Testing

-- Dear Mr. Hall:

On September 7, 2000 and January 22, 2001 tests were conducted on the "The Refuge" cellar door and locking mechanisms. The tests were consistent with FEMA 320 (Taking Shelter from the Storm) guidelines requiring the cellar door to resist a **15-lb.** 2x4 missile traveling vertically at 67 mphi. This missile speed relates to debris dropped by a 250 mph tornado.

Congratulations on your sheller door successfully passing the FEMA 320 tests.

Sincerely,

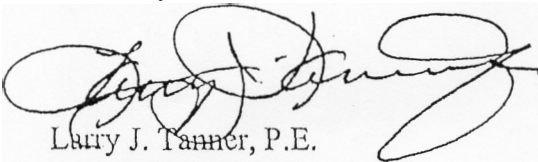

Larry J. Tanner, P.E.
Research Associate

Investigation of the Door System for Use in “The Refuge” Below Ground Tornado Shelter

Overview of Project

Mr. Kelly Hall of Fiberglass Creations contacted the Wind Science and Engineering (**WISE**) Research Center at Texas Tech University to assess the ability of their door system to resist tornado forces and debris impacts. Tests were conducted on September 7, 2000 and January 22, 2001. The specifics about each test, results, and conclusions follow.


The missile criterion used for the tests was a 15-lb. 2x4-in. wood board traveling along the board's longitudinal axis, striking the panel perpendicular to the panel face. The tornado test criterion uses this missile traveling at 67-mph which corresponds to debris dropped vertically by a 250-mph ground-level wind and is the criterion used in designing for occupant protection. Additional factors of safety are inherent in the criterion since there is a very small probability that a missile will be traveling along its axis and will strike a wall perpendicular to its surface.

A pressure test was not conducted on the door system. The missile criterion used in the test is consistent with the guidelines of FEMA 320; "Taking Shelter from the Storm."

Conclusions

Within the bounds of reasonable engineering and technical certainty, and subject to change if additional information becomes available, the following is my professional opinion:

The door assembly for The Refuge (underground shelter), manufactured by Fiberglass Creations, is capable of resisting the 15-lb. 2x4 traveling vertically at 67 mph, as required by FEMA 320. The additions of the clips to the pneumatic operator and the chain to the boomer latches will prevent disengagement upon impact. The relocation of the vent from the door to a piped from the rear of the shelter will prevent large debris from entering the shelter.

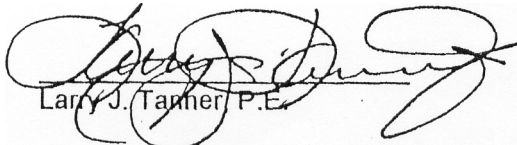

Larry J. Tanner, P.E.

Use of Testing Report and TTU and WISE Logos

The written report and supplemental photos and/or videos may be referenced or distributed by your company. But, Texas Tech University cannot endorse products nor can the name of the University or any of its units or personnel be used in advertising without first securing written permission from the University. Any misuse or misrepresentation of the report and/or pictures will result in action being taken by the University against the responsible parties.

Storm shelter manufacturers or producers who have had products tested at Texas Tech University can use the Texas Tech University Wind Engineering logo provided they conform to the following:

- I. The Texas Tech University Wind Engineering logo may not be so prominent as to mislead the public or unduly play upon the Texas Tech University Wind Engineering name.
- II. Whenever the logo is used one of the two alternative statements below is to be employed in the text:

Alternate 1 – whole shelter

The use of the Texas Tech University Wind Engineering logo signifies that the complete shelter structure was tested and successfully passed missile impact resistance tests at Texas Tech University.

Alternate 2 - shelter component

The use of **the** Texas Tech University Wind Engineering logo does not signify that the entire shelter structure was tested at Texas Tech, **but** rather only [shelter component – name explicitly] was tested and successfully passed missile impact resistance tests at Texas Tech University.

- III. All advertising and promotional texts containing the use of the Texas Tech University Wind Engineering logo are to be presented to the Texas Tech University Office of Technology Transfer and Intellectual Property for review and approval before distribution.

Texas Tech University will challenge any use of the Texas Tech University Wind Engineering logo that does not conform to the above standards.